


K-FLEX® PVC AT 070 SELF-ADHESIVE TAPE

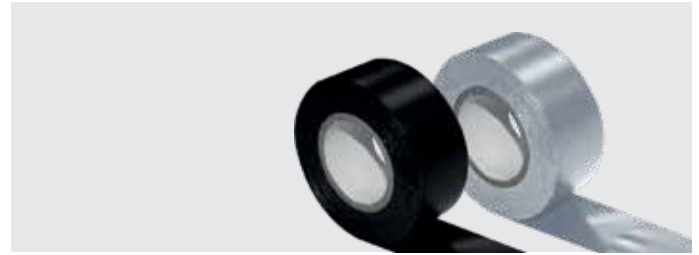

A thin premium grade plasticized PVC film coated with an aggressive rubber based adhesive with good characteristics. It is highly conformable and unaffected by most chemicals and moisture. Meet ROHS, REACH requirement. It does not contain substances harmful to human body, such as lead and cadmium.

MEASUREMENTS

Length: 25 m

Heights: 25 - 38 - 50 mm

APPLICATIONS

- ▶ Electric insulation below 600V
- ▶ Insulating wrapping of electric wires and cables
- ▶ Marking of electric wires and cables
- ▶ Can be used indoor and outdoor

K-FLEX® PVC AT 070 SELF-ADHESIVE TAPE ▶ TECHNICAL DATA		
Property ▼	Value ▼	Test method ▼
Total thickness	0.10 mm	ASTM-D-1000
Tensile strength	20 N/cm	ASTM-D-1000
Elongation to break	200%	ASTM-D-1000
Adhesion Strength: to steel	1,5 N/cm	ASTM-D-1000
to backing	1,5 N/cm	ASTM-D-1000
Voltage resistance	600 V	UL510
Temperature resistance	80 °C	ASTM-D-1000
Flame resistance	<2 s	ASTM-D-1000
Content of Heavy Metal:		
Lead, Cadmium	<30 ppm	US EPA3052
Mercury, Chromium	<10 ppm	US EPA3060A
Polybrominated biphenyl	<10 ppm	US EPA3540C

K-FLEX® reserves the right to change data and technical requirements without notice.