

# Steel Single-Blade Damper

## DSQ



### Description


The single-blade damper is used to control or shut off the air flow in ventilation ducts. The blade is stiffened with transverse sheet corrugation, depending on the size. It is possible to lock the position of blade by two locking screws. The standard version of DSQ is manual mechanism. For dimensions A and B  $\leq 300$  is mounted mechanism DS-KIT-PVC. For other dimensions is mounted KIT-DS mechanisms. Standard length:  
 L=200 for  $B \leq 300$   
 L=250 for  $300 < B \leq 500$   
 L=300 for  $500 < B \leq 700$

#### Example identification

Product code: **DSQ 600 400**

type \_\_\_\_\_  
 a \_\_\_\_\_  
 b \_\_\_\_\_

### Dimensions

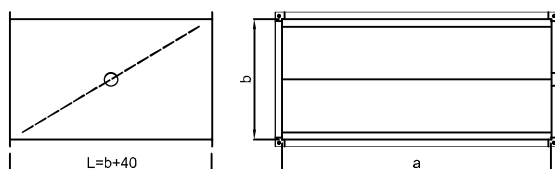

The control mechanism is fitted onto side b